
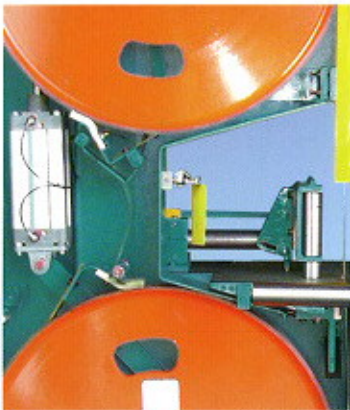


STENNER

NEW

ST100R Radial Arm Resaw

POWER AND
PRECISION

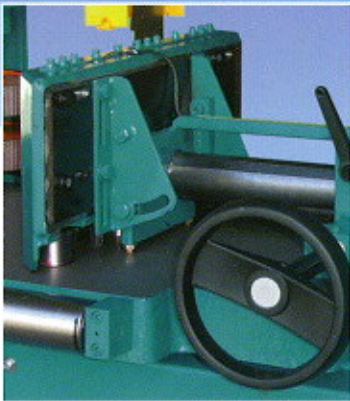



ST100R Radial Arm Resaw

The ST100R is the latest model from the world renowned Stenner range of Classical Resaws which have long provided a major contribution to secondary processing in the timber and joinery industries

The ST100R represents another advance in technology and build quality whilst continuing the Stenner tradition of providing a high capacity machine of compact dimensions which will meet a broad range of sawing requirements.

Like its predecessor, the ST100R is a 'pitless' resaw requiring no special installation other than the requirement for mains electricity, air supply and extraction.

The machine now incorporates a full width cast iron table with infeed and outfeed idle rollers, a heavy duty multi roller fence with digital readout, replaceable pressure saw guides to ensure accuracy,


pneumatic saw straining, a re-sited HMI control unit for easier visibility, infinitely variable feed rates 5-60 metres/min and of course the traditional 915mm diameter cast iron pulley wheels which have been such a hallmark of Stenner Resaws over the years.

To further increase productivity included as standard equipment on this latest model is a pneumatically operated radial arm feed which is activated by photocell. The standard machine incorporates a hand wheel for fine adjustment and a foot pedal override facility is also available as an option.

This Resaw incorporates a 20HP (15kW) main drive motor, and takes sawblades up to 4" wide, thereby providing supreme power and performance which together with the information provided by the HMI control unit, makes this resaw the ultimate in safe and 'operator friendly' performance.



Optional foot pedal control

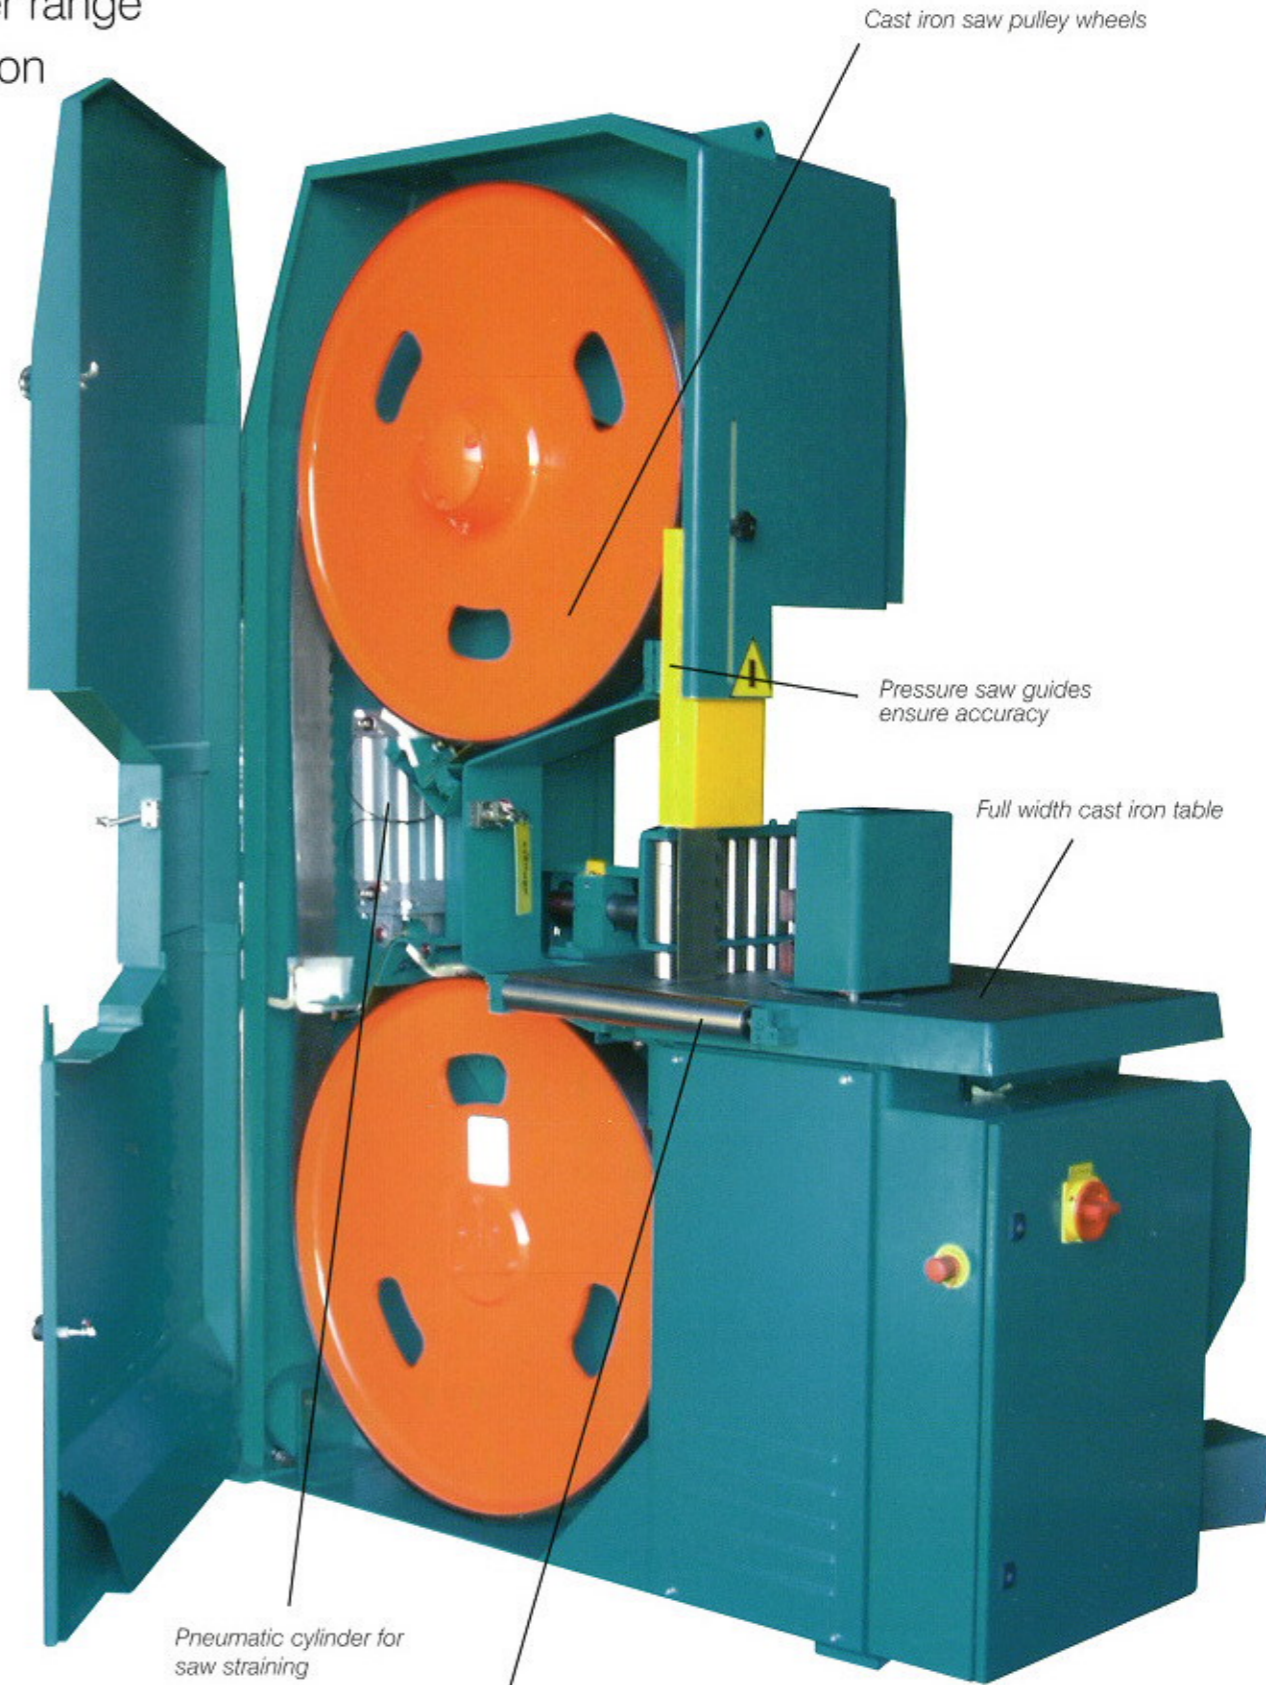

Cast iron saw pulley wheels

Pressure saw guides ensure accuracy


Full width cast iron table

Pneumatic cylinder for saw straining

Idle rollers front and rear of table




Automatic blade lubrication

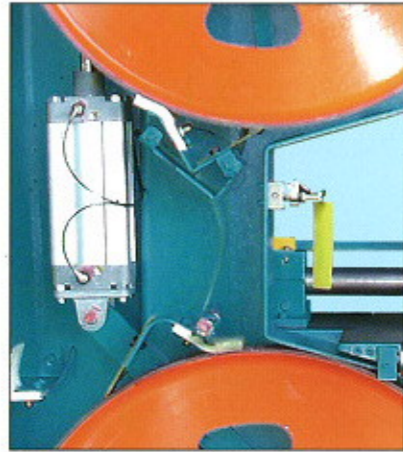


Pneumatic saw straining



HMI Control Unit

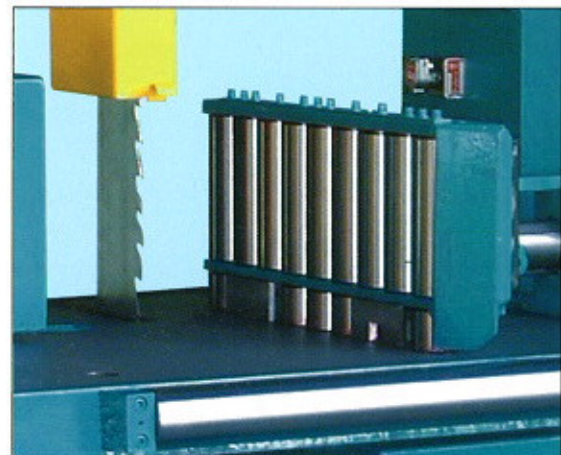

Heavy duty multi roller fence

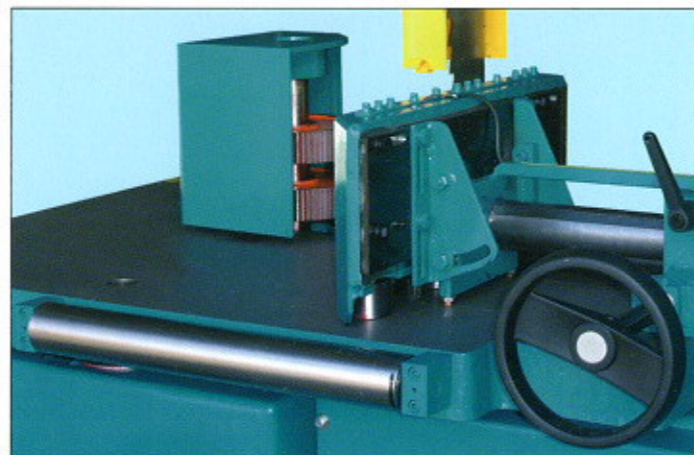


Idle rollers front and rear of table



STENNER

ST100R Specifications

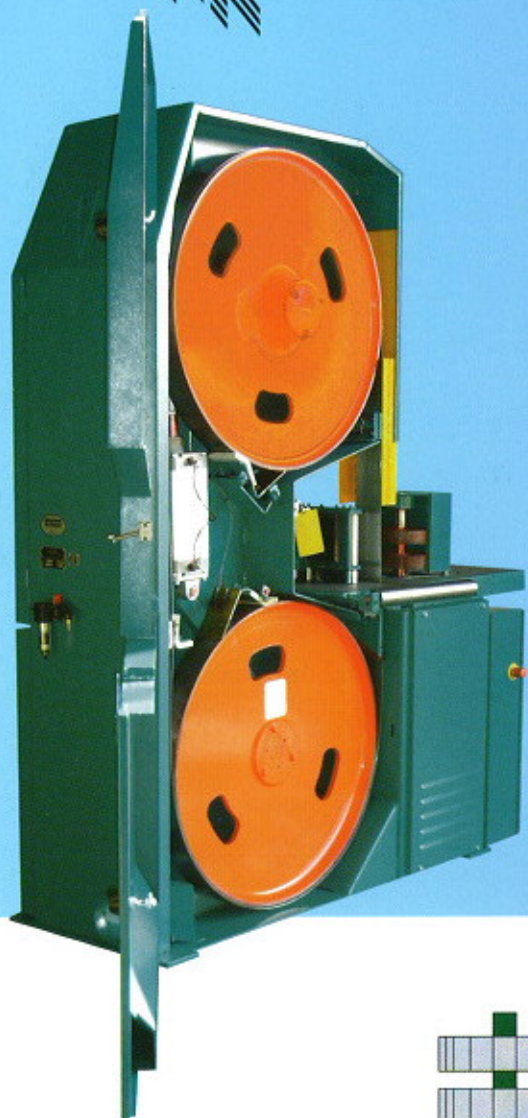


Bandsaw pulley diameter	915 mm (36")
Bandsaw thickness	Max 1.0 mm (19g) Min 0.8 mm (21g)
Bandsaw blade width	Max 100 mm (4")
Bandsaw blade length	Max 5565 mm (18'3") Min 5405 mm (17'9")
Depth of cut	Max 400 mm (15.75")
Max opening: roller fence to saw line	300 mm (12")
Max opening: feed rollers to saw line	230 mm (9")
Feeds speeds (infinitely variable)	5 – 60 metres/min
Main motor	15kW (20hp)
Working height of table from floor	955 mm (37.5")
Cleaner fluid capacity	3 litres (0.66 gallon)
Pneumatic requirements	0.2 litres/sec (0.42 cfm) @ 6 bar
Dust extraction outlet	150 mm
Machine height	2175 mm (7' 2")
Machine width	1790 mm (5' 10")
Machine length	900 mm (3' 0")
Machine weight	1500 kgs (1.5 ton)

The company has a policy of continuous product development and improvement, specifications are therefore subject to change without notice. The company accepts no liability for discrepancies in specifications or illustrations contained in its publications.

Optional Extras:

- Remote control position with feed system controls and emergency stop.
- Pressure Spray Lubrication System replacing standard drip feed system. System minimises use of blade lubricant whilst ensuring maximum lubrication.
- Independent Timber support rollers.
- Linear timber measuring unit.
- Ammeter to measure load on main motor.
- Sawblade deviation detector.
- Arris rail or rubber covered feed rollers to suit customers individual requirements.
- Foot pedal override for pneumatic feed.

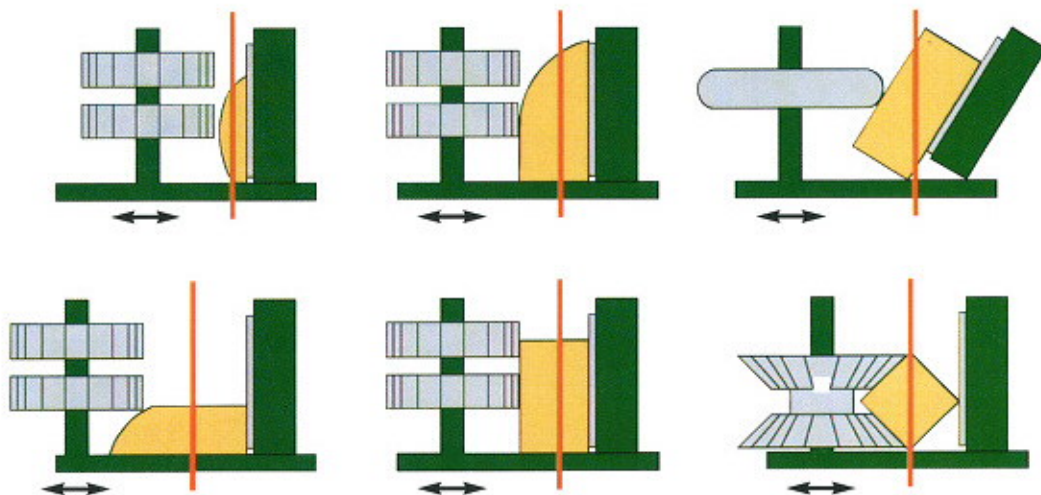

Sales and marketing by Main Distributor:

DALTONS

WOODWORKING MACHINES WORLDWIDE

A L Dalton Limited

Crossgate Drive, Queens Drive Industrial Estate,
Nottingham, NG2 1LW, United Kingdom.
Tel: 0115 9865201 Fax: 0115 9862820
e-mail: sales@daltonswmw.co.uk
Website: www.daltonswmw.co.uk



Manufactured in the UK by Stenner Ltd
Blundells Road, Tiverton, Devon